

MM Kwidzyn sp. z o.o.

UL. LOTNICZA 1,

82-500 KWIDZYN, POLAND




KWIDZYN

TECHNICAL DATA SHEET

SPEED-E OFFSET

Parameter	Standard	Unit	Measurement					
Substance	EN ISO 536	g/m ²	60 ± 2	70 ± 2	75* ± 2	80 ± 2	90 ± 2	100 ± 2
Thickness	ISO 534	µm	77 ± 3	89 ± 3	96 ± 3	101 ± 3	112 ± 4	124 ± 4
Moisture content	EN ISO 287	%	6 ± 1	6 ± 1	6 ± 1	6 ± 1	6 ± 1	6 ± 1
Whiteness	ISO 11475	CIE units	146 ± 3	146 ± 3	146 ± 3	146 ± 3	146 ± 3	146 ± 3
Opacity	ISO 2471	%	85 +2/-1	89 +2/-1	90 +2/-1	92 +2/-1	93 +2/-1	94 +2/-1
Bendtsen roughness	ISO 8791-2	ml/min	160 ± 50	160 ± 50	160 ± 50	160 ± 50	160 ± 50	160 ± 50
Cobb 60	EN ISO 535	g/m ²	≤30	≤30	≤30	≤30	≤30	≤30
Tensile strength	EN ISO 1924-2	kN/m	4,0 +2/-1	4,0 +2/-1	4,0 +2/-1	4,0 +2/-1	4,5 +2/-1	4,5 +2/-1

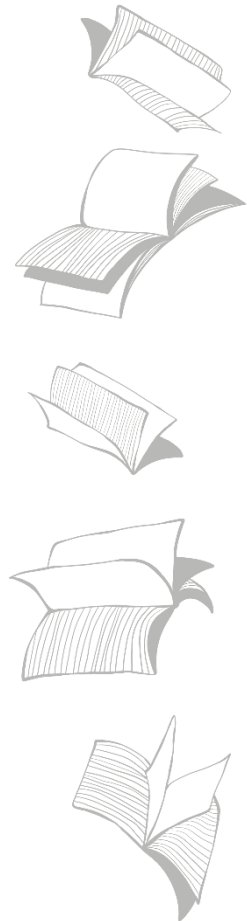

* Subject to trim and accumulation. For more information contact your dedicated customer service team.

AVAILABLE CERTIFICATION:



✓ 100% ECF fibres

The data presented can be changed without notice.