

MM Kwidzyn sp. z o.o.

UL. LOTNICZA 1,

82-500 KWIDZYN, POLAND




KWIDZYN

TECHNICAL DATA SHEET

SPEED-E LASER

Parameter	Standard	Unit	Measurement			
Substance	EN ISO 536	g/m ²	70* ± 2	75 ± 2	80 ± 2	90 ± 2
Thickness	ISO 534	µm	87 ± 3	94 ± 3	100 ± 3	112 ± 3
Moisture content	EN ISO 287	%	4,0 - 5,5	4,0 - 5,5	4,0 - 5,5	4,0 - 5,5
Whiteness	ISO 11475	CIE units	146 ± 3	146 ± 3	146 ± 3	146 ± 3
Opacity	ISO 2471	%	89 +2/-1	91 +2/-1	92 +2/-1	94 +2/-1
Bendtsen roughness	ISO 8791-2	ml/min	150 ± 50	150 ± 50	150 ± 50	150 ± 50
Cobb 60	EN ISO 535	g/m ²	≤30	≤30	≤30	≤30

* Subject to trim and accumulation. For more information contact your dedicated customer service team.

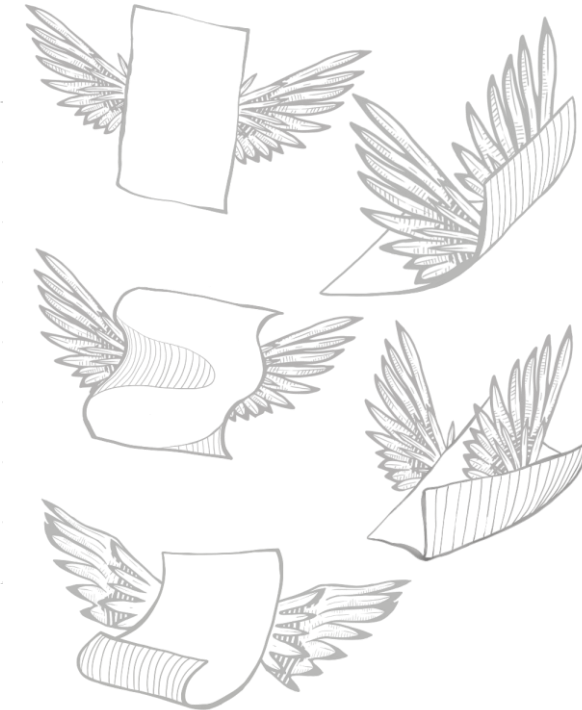

AVAILABLE CERTIFICATION:



✓ 100% ECF fibres